



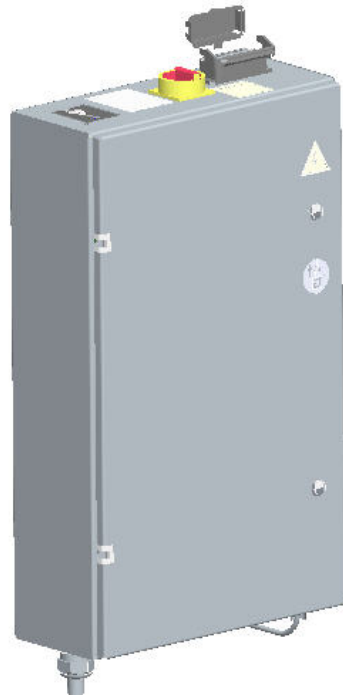

The modular highspeed aggregate up to 15mm bandwidth

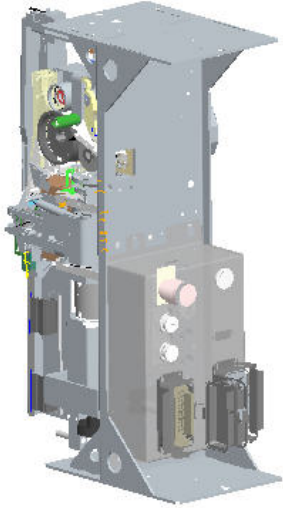


- User-friendly and intuitive
- Economical owing to highest availability
- Robust and extremely low maintenance
- Variable strap width

EQUIPMENT:

- ASLF 'Anti-Strap-Loss-Function' Constant strap control
- Automatic Strap feed
- Operation Terminal with Soft-Button
- DAT 'Direct-Access-Technology'
- Torque controlled strap tension, adjustable
- Tension adjustable with 10 steps
- Wear-free, energy saving direct-drive-motors
- Low maintenance and low wear strap arch
- Many specific options available, easily configurable

SMB MAX

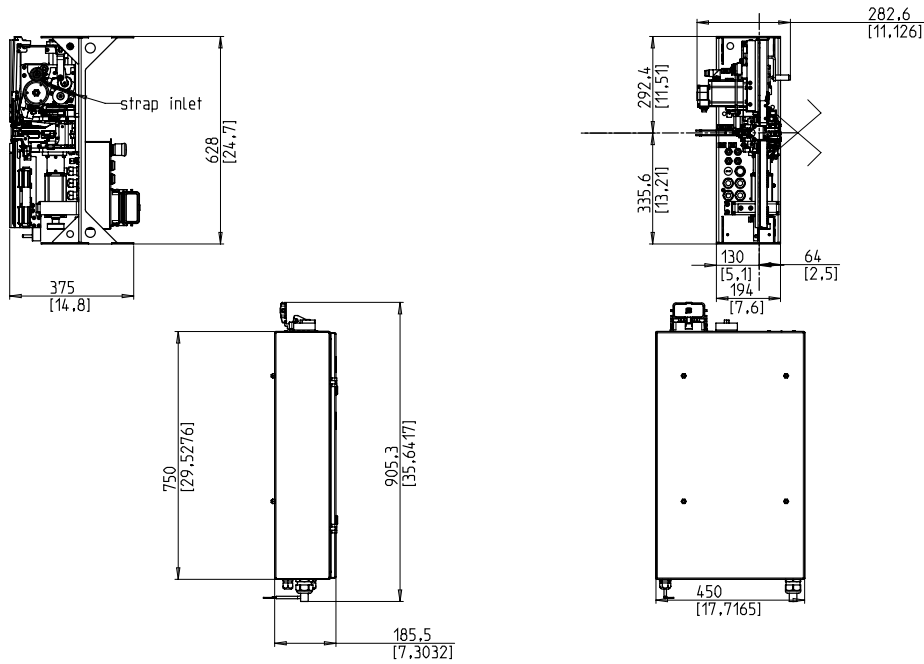

TECHNICAL SPECIFICATION:

CAPACITY:

Single strap, bundles/minute up to: max. 50
 Based on bundle size l x w in mm: 500x550
 Depending on arch size and tension force

BUNDLES:

Width in mm: min. 55
 Max. bundle width depending on arch size
 Height in mm: min. 80
 Max. bundle height depending on arch size
 (see drawing)

STRAP TENSION:

Adjustable with 10 steps
 Tension at bundle in N: max. 600

STRAPPING MATERIAL:

PP and PET Strap DIN EN 13 394
 Width in mm: 12 - 15
 Thickness in mm: 0,4 - 0,9

SEALING METHOD:

Heat seal. Tensile strength of welded joint is approx. 60 - 80 % of the breaking strength of the strap

POWER SUPPLY:

Wide Range Input 100-240V, 1AC; 47-63 Hz: optional
 Wide Range Input 380-520V, 3AC; 47 63 Hz
 Maximum fusing 16A (B-character)
 Protection Type: IP 22

POWER CONSUMPTION:

Power consumption in kW approx.: 0,5

WEIGHT:

Total weight approx. in kg: 70

OPERATING CONDITIONS:

Temperature range in °C [°F]: 0 [32] - +50 [122]



SMB SCHWEDE MASCHINENBAU GMBH
 Markgrafenstraße 2 | D-95497 Goldkronach | Germany
 Tel.: +49 (0) 9273 / 982-201 | Fax.: +49 (0) 9273 / 982-100
www.smb.biz | sales@smb.biz

